
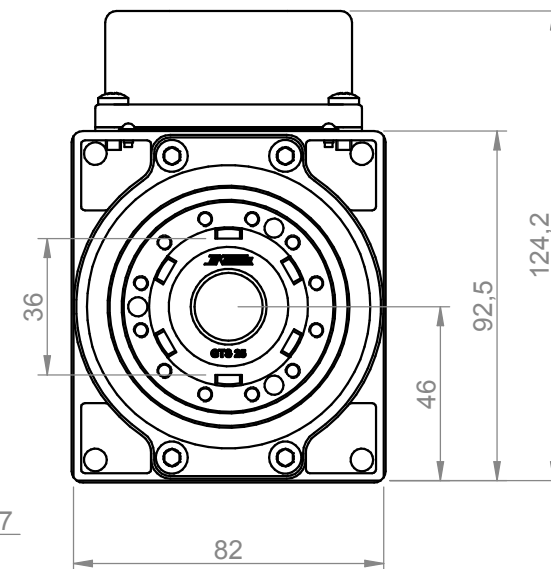
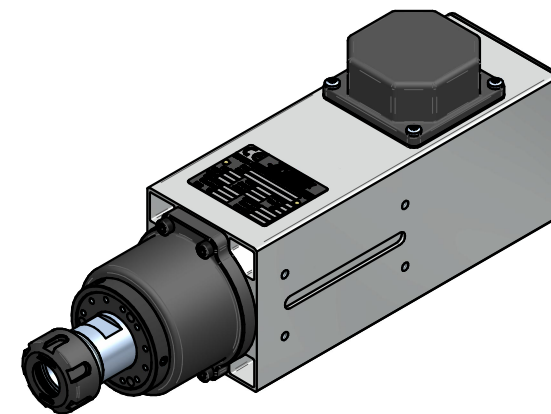
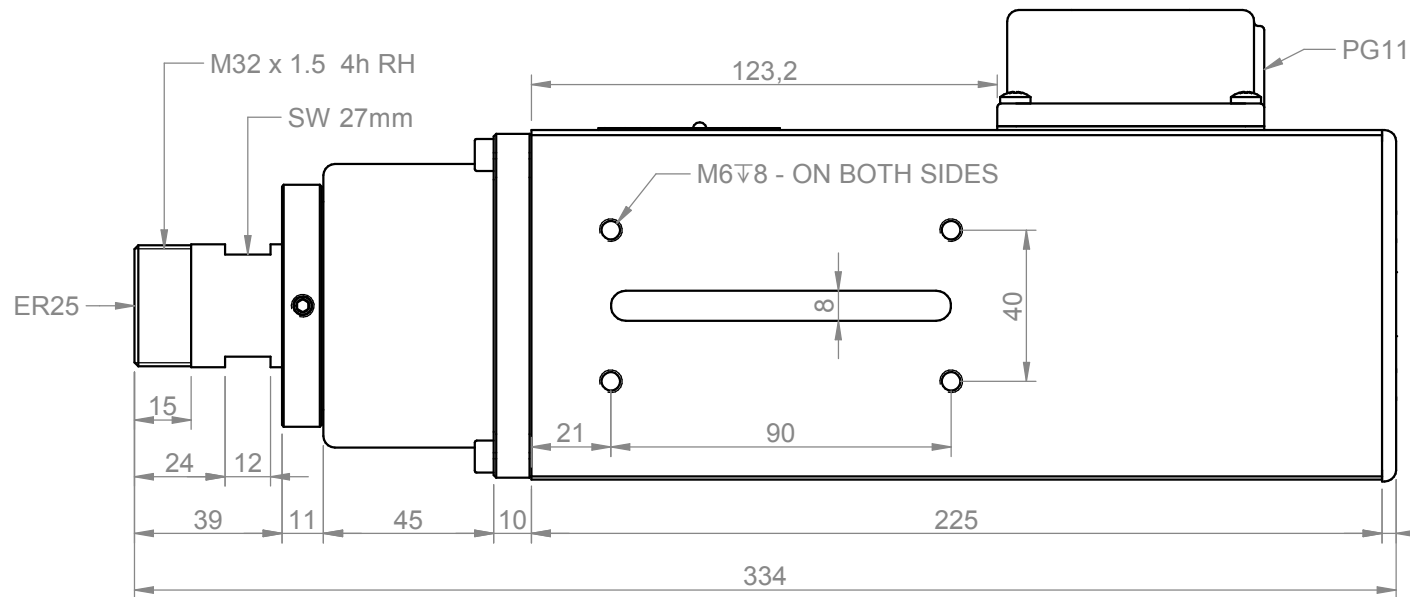


Ghiera serraggio
GTS25 RH

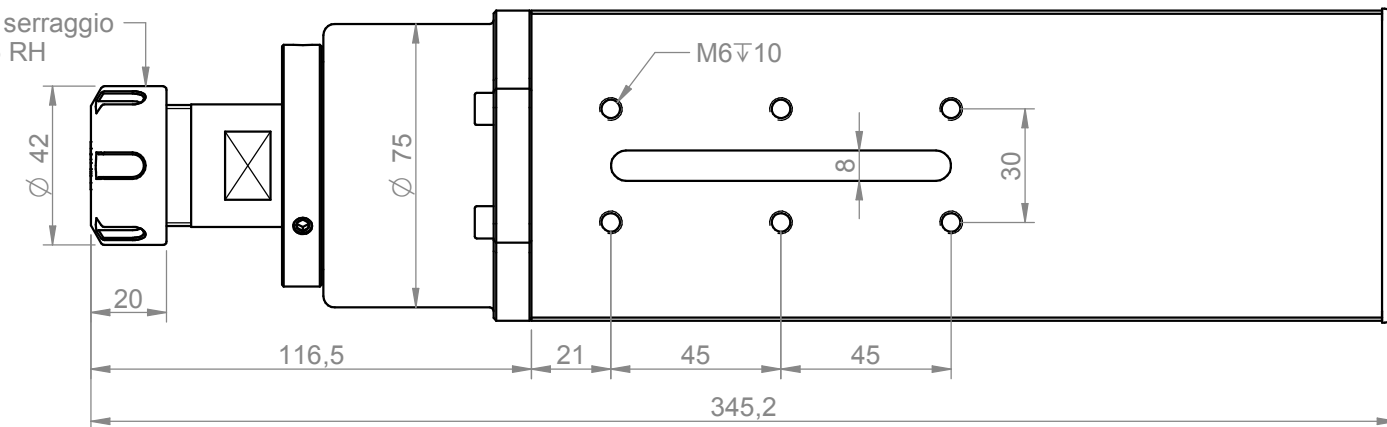

Power [kW] 2.2	Duty Cycle S1	Base speed [rpm] 18000	Base freq. [Hz] 300	Base voltage Δ [V] 220	Base voltage Y [V] 380	Protection IP54	Ins. Cl. F	 Teknomotor S.r.l. Via Argenega 31, I-32038 Quero Vas (BL) www.teknomotor.com						
Min speed [rpm] 6000		Max speed [rpm] 18000	Max freq. [Hz] 300	Absorb. Δ [A] 9.0	Absorb. Y [A] 5.2	Part number on nameplate COM41470366								
Balancing according to ISO 1940 - G2.5 @ 18000 rpm		Balancing type		tool type full key 	tool type half key 	Peso / weight 8.15 kg		Title 4147-C-DB-P-ER25-RH						
Tolleranze non quotate / unlisted tolerances: ±0.5mm Smussi non quotati / unlisted chamfers: ±0.5mm				 = 0.8 √	 = 3.2 √	 = 12.5 √	 = √							
rev. n° 00	description Emissione					date 15/02/2010	signature D. Bottarel	Customer Catalogo						
								Drawing code COM41470366						
drawn - date D. Bottarel - 15/02/2010		approved - date S. Perli - 15/02/2010		checked - date S. Perli - 15/02/2010		sostituisce il sostituito dal			foglio / sheet 1 / 1		scala 1:2			A4