
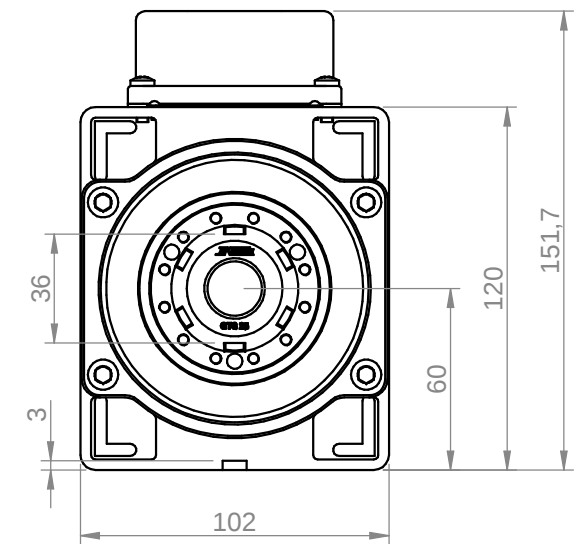


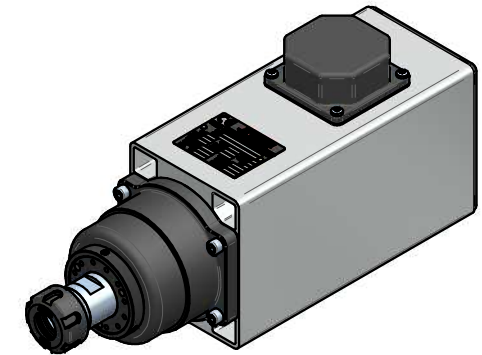

Power [kW] 3.3	Duty Cycle S1	Base speed [rpm] 18000	Base freq. [Hz] 300	Base voltage Δ [V] 220	Base voltage Y [V] 380	Protection IP54	Ins. Cl. F	 Teknomotor S.r.l. Via Argeneo 31, I-32038 Quero Vas (BL) www.teknomotor.com				
Min speed [rpm] 6000		Max speed [rpm] 18000	Max freq. [Hz] 300	Absorb. Δ [A] 13.7	Absorb. Y [A] 7.9	Part number on nameplate COM51600010						
Balancing according to ISO 1940 - G2.5 @ 18000 rpm		Balancing type		tool type full key 	tool type half key 	Peso / weight 12.31 kg						
Tolleranze non quotate / unlisted tolerances: ±0.5mm Smussi non quotati / unlisted chamfers: ±0.5mm				 = 0.8 	 = 3.2 	 = 12.5 	 = 9 					
rev. n° 00	description Emissione					date 18/03/2015	signature D. Bottarel	Title 5160-A-DB-P-ER25-RH				
								Customer Catalogo				
								Drawing code COM51600010				
drawn - date D. Bottarel - 18/03/2015		approved - date S. Perli - 18/03/2015		checked - date S. Perli - 18/03/2015		sostituisce il			foglio / sheet 1 / 1		 	A4
						sostituito dal						

Il presente disegno è di proprietà esclusiva di Teknomotor S.r.l. La riproduzione totale e/o parziale e la divulgazione a terzi, senza nostro esplicito consenso scritto, verrà perseguito secondo i termini di legge in vigore.